




Full Color Cross P6

Outdoor IP65

Double Sided

Ref.293062

Pitch	6mm
Brightness	±5.000/ 5.000nits
Display Dis.	≥6m
Max. power	≤384w
Average power consumption	± 153w
Operating voltage	230V
Chassis/ Aperture	Metal RAL6016. Op.upwards
Scanning	1/8
Pixels	96*96px*face
Viewing Angle	H:140°-V:130°
Weight /With packaging	±23,5Kg/ ±27,7Kg



With packaging: 1160*730*180mm




Full Color Cross P8s

Outdoor IP65

Double Sided

Ref.293081

Pitch	8mm
Brightness	±5.000/ 5.500nits
Display Dis.	≥8m
Max. power	≤562w
Average power consumption	± 224w
Operating voltage	230V
Chassis/ Aperture	Metal RAL6016. Op. upwards
Scanning	1/8
Pixels	96*96px*face
Viewing Angle	H:140° - V:130°
Weight /With packaging	±32,3Kg/ ±39,1Kg



With packaging: 1350*930*180mm




Full Color Cross P8XXL

Outdoor IP65

Double Sided



Ref.293083

Pitch	8mm
Brightness	±5.000/ 5.500nits
Display Dis.	≥8m
Max. Power	≤886w
Average power consumption	± 355w
Operating voltage	230V
Chassis/ Aperture	Metal RAL6016. Op.upwards
Scanning	1/5
Pixels	120*120px*face
Viewing Angle	H:140° - V:130° - V:130°
Weight /With packaging	±39,5Kg/ ±45Kg

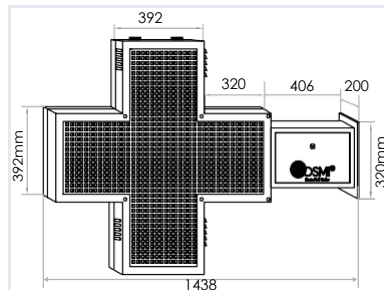

With packaging: 1830*1110*180mm

Orion Full Color cross equipment range

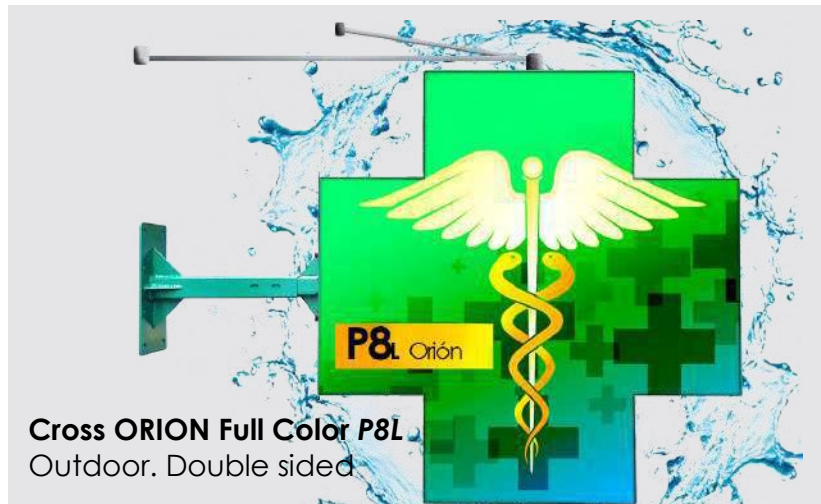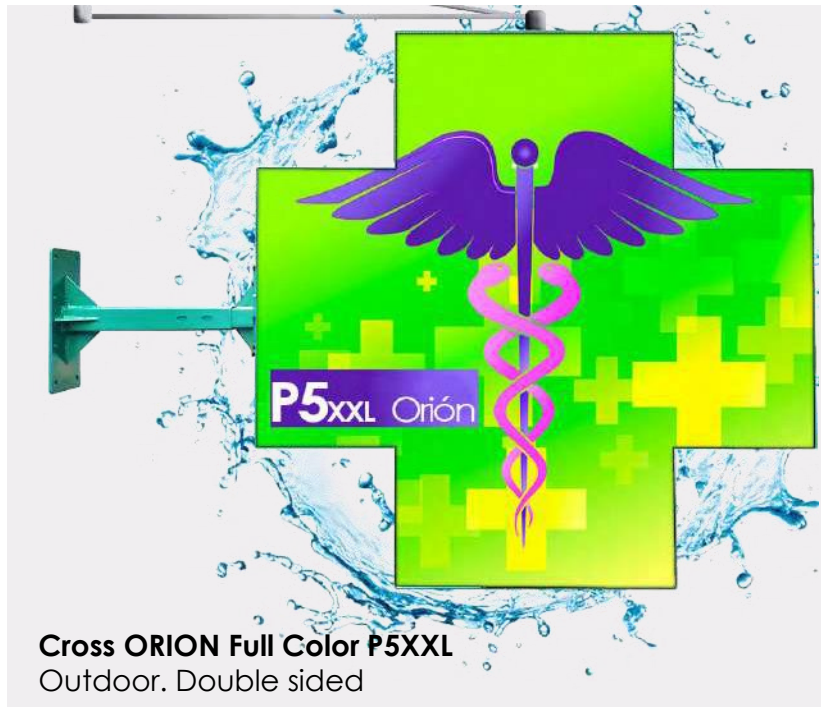




Cross Orión Full Color P6S

Outdoor IP65


Double sided

Ref.293026

Pitch	6mm
Brightness	±5.000/ 5.500nits
Display Dis.	≥6m
Max. power	≤837w
Average power consumption	± 335w
Operating voltage	230V
Chassis/ Aperture	Metal RAL6016. Op.upwards
Scanning	1/8
Pixels	128*128px*face
Viewing Angle	H:140°-V:130°
Weight /With packaging	±27Kg+claw/ ±32Kg+claw



With packaging: ±850*850mm + claw

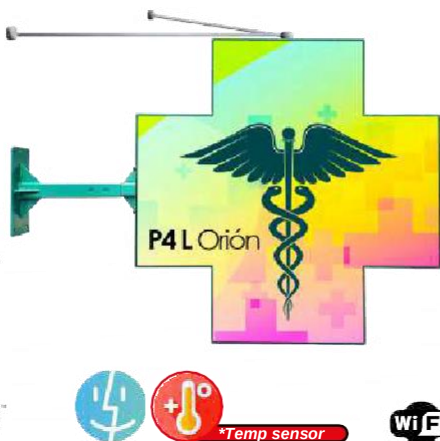


Cross Orión Full Color P4L

Outdoor IP65


Double sided

Ref.293024

Pitch	4mm
Brightness	±5.000/ 5.500nits
Display Dis.	≥4m
Max. power	≤1440w
Average power consumption	±576w
Operating voltage	230V
Chassis/ Aperture	Metal RAL6016. Op.upwards
Scanning	1/10
Pixels	256*256px*face
Viewing Angle	H:140° - V:130° - V:130°
Weight /With packaging	±57Kg+claw/ ±63Kg+claw

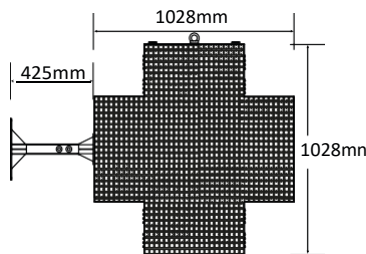

With packaging: 1110*1110*180mm + claw




Cross Orión Full Color P8L

Outdoor IP65

Double sided

Ref.293028

Pitch	8mm
Brightness	±5.000/ 5.500nits
Display Dis.	≥8m
Max. power	≤1344w
Average power consumption	± 537w
Operating voltage	230V
Chassis/ Aperture	Metal RAL6016. Op.upwards
Scanning	1/8
Pixels	128*128px*face
Viewing Angle	H:140° - V:130° - V:130°
Weight /With packaging	±57Kg+claw/ ±63Kg+claw

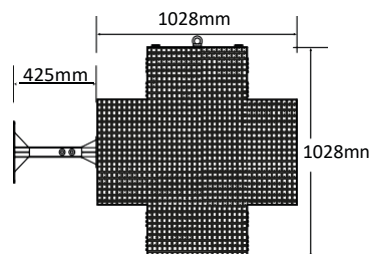

With packaging: 1110*1110*180mm + claw